



ANELTEC

INTEGRATED SEAL GI-28

INTEGRATED SEAL ANELTEC GI-28 the seal doubles.


ANELTEC GI-28 is composed of two parts, one integrated and one of support that can be reused several times.

ANELTEC GI-28 is a seal for concrete and reinforced concrete pipes with spigot joint.

The product consists of two parts, a triangular one with sealing function and the other working as a support and protection that can be reused several times.


It needs a particular cap specifically created with a shape that allows the seal to be properly placed. ANELTEC GI-28 is made of EPDM elastomer in accordance with ANELTEC high standards and in compliance with the EN 681-1 European regulations in force.

PRODUCT DETAILS

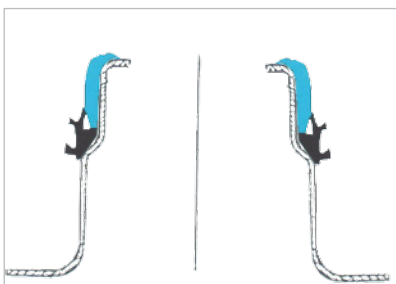


Joint-Counter Joint System

The black part in the drawing remains fastened to the pipe whereas the blue one is removed and reused.

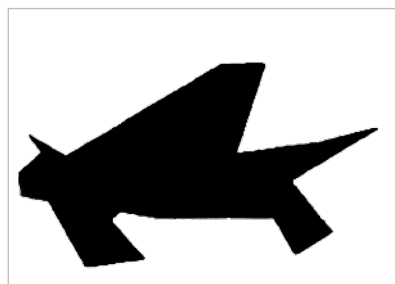

Solid anchoring

Thanks to the special shape of its wings, the seal tightly fastens to the pipe.

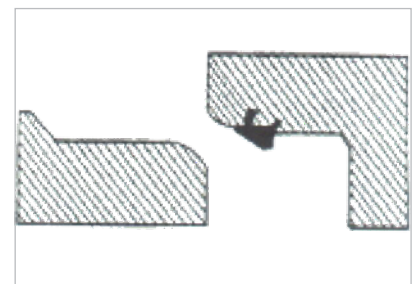

Quick assembly

The seal shape allows for an easy sliding of the male part for a quick and safe assembly.




ANELTEC srl

Via Tagiura 10 | 20146 Milano | +39 02 42 23 343 | +39 02 48 95 24 70 (Fax)
info@aneltec.it | www.aneltec.it

EN 681-1



ANELTEC GI-28

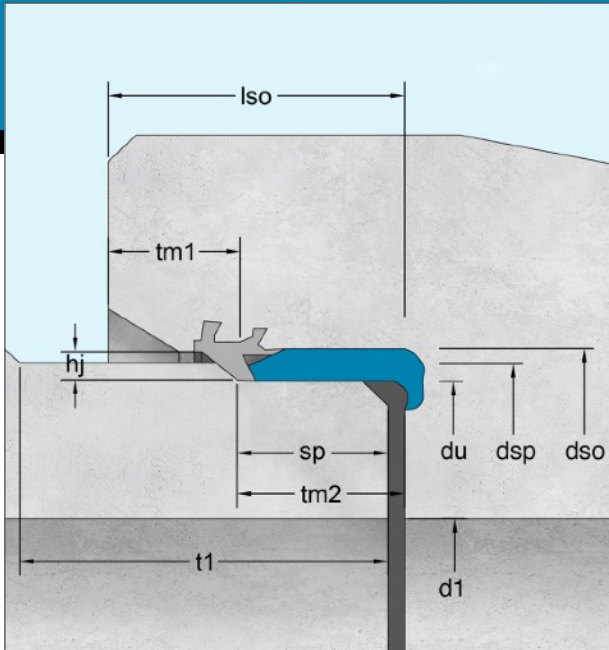


- Made of EPDM rubber with hardness 50 ± 5 IRDH, the material is highly resistant to the constant aggression of waste waters.
- It needs a cap specifically intended for this seal type.
- Available in various sizes to always meet any need.

DN = \varnothing d1	\varnothing asp	\varnothing du	lsp	tm2	t1	tm1	Iso	hj	w
300	386,0	377,6	39	43,5	85	38,0	80	12	$7,8 \pm 1,2$
400	404,0	395,6	39	43,5	85	38,0	80	12	$7,8 \pm 1,2$
500	610,0	600,2	43	49,0	95	43,0	90	14	$9,1 \pm 1,4$
600	726,0	716,2	43	49,0	95	43,0	90	14	$9,1 \pm 1,4$
700	844,0	831,4	47	54,4	105	45,6	100	18	$11,7 \pm 1,8$
800	926,0	949,4	47	54,4	105	45,6	100	18	$11,7 \pm 1,8$
900	1080,0	1067,4	47	54,4	105	45,6	100	18	$11,7 \pm 1,8$
1000	1198,0	1185,4	47	54,4	105	45,6	100	18	$11,7 \pm 1,8$
1100	1316,0	1303,4	47	54,4	105	45,6	100	18	$11,7 \pm 1,8$
1200	1434,0	1421,4	47	54,4	105	45,6	100	18	$11,7 \pm 1,8$
1300	1552,0	1536,6	58	67,0	130	58,0	125	22	$14,3 \pm 2,2$
1400	1670,0	1654,6	58	67,0	130	58,0	125	22	$14,3 \pm 2,2$
1500	1788,0	1772,6	58	67,0	130	58,0	125	22	$14,3 \pm 2,2$
1600	1760,2	1742,0	69	80,0	150	69,0	145	26	$16,9 \pm 2,6$
1800	1960,2	1942,0	69	80,0	150	69,0	145	26	$16,9 \pm 2,6$
2000	2183,8	2165,0	69	80,0	150	69,0	145	26	$16,9 \pm 2,6$

PIPES ASSEMBLY AND LAYING

The use of ANELTEC lubricant is recommended for the assembly of all our seals.

The assembly and laying of shafts that use ANELTEC GI-28 can be made by means of the typical site equipment in compliance with the EN 1610 regulation. The joint has been devised to easily withstand the stresses developed during the assembly phase so as to avoid fractures and damages.

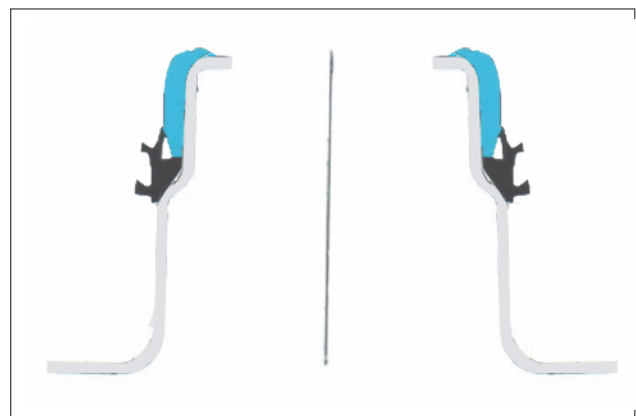

ANELTEC srl

Via Tagiura 10 | 20146 Milano | +39 02 42 23 343 | +39 02 48 95 24 70 (Fax)
info@aneltec.it | www.aneltec.it

EN 681-1

