WATERSTOP JOINTS Waterproofing Solutions



ANELTEC supplies a complete range of easy-to-install products for sealing withstruction joints, fittings and withstruction joints.

The solutions we offer are **hydro-expansive sealants** based on sodium bentonite and **Waterstop profiles** in soft PVC for expansion joints and withstruction joints.

BENTONITE JOINT Hydrophilic Waterstop Profile

It is used for the hydraulic sealing of vertical and horizontal joints of underground withcrete structures.

In withtact with water, its volume increases, filling every crevice and cavity, and thus creating a perfect seal to the passage of water.

It is available in two sections, and supplied on request with a fixing net.





PVC WATERSTOP Extruded Profiles in Soft PVC

They are profiles used to create withstruction joints and expansion joints in underground withcrete structures.

They are positioned during the casting, and on the finished product they ensure a perfect hydraulic seal. They are used for channels, tanks, dams, purifiers, etc...

They are sized in various widths and thicknesses to withstand water pressure, the stresses of settling structures and thermal excursions.




ANELTEC srl

Via Tagiura 10 | 20146 Milano | +39 02 42 23 343 | +39 02 48 95 24 70 (Fax) info@aneltec.it | www.aneltec.it

WLA


Waterstop Joint with Bulb for Expansion Joints

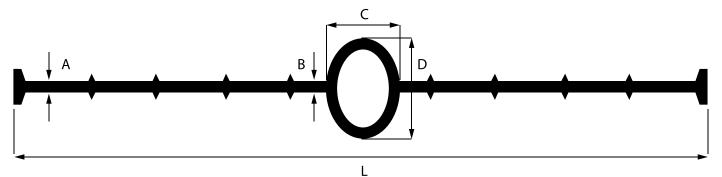

Code	Α	В	С	D	L	Withf.
	mm	mm	mm	mm	mm	
WLA 150 Bulb	2,3	3,5	23	27	150	25 mt.
WLA 200 Bulb	2,5	3,7	25	30	200	25 mt.
WLA 220 Bulb	2,5	3,7	25	30	220	25 mt.
WLA 250 Bulb	2,5	4,0	25	30	250	25 mt.
WLA 260 Bulb	2,8	5,5	25	32	260	25 mt.
WLA 300 Bulb	2,6	4,0	30	38	300	20 mt.
WLA 320 Bulb	3,0	4,5	27	32	320	20 mt.
WLA 360 Bulb	4,0	6,4	37	45	360	15 mt.
WLA 440 Bulb	4,0	8,0	48	48	440	15 mt.

WLB

Flat Waterstop Joint for Construction Joints



Code	А	В	С	D	L	Withf.
	mm	mm	mm	mm	mm	
WLB 150 Flat					150	50/25 mt.
WLB 200 Flat					200	50/25 mt.
WLB 250 Flat					250	30 mt.
WLB 300 Flat	3,5				300	30 mt.




ANELTEC srl

Via Tagiura 10 | 20146 Milano | +39 02 42 23 343 | +39 02 48 95 24 70 (Fax) info@aneltec.it | www.aneltec.it

WLC


Flat Waterstop Joint for Construction Joints (external use)

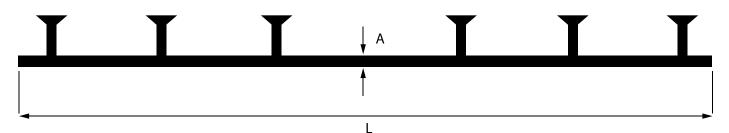

Code	Α	В	С	D	L	Withf.
	mm	mm	mm	mm	mm	
WLC 200 Flat	3,2			17	200	20/25 mt.
WLC 250 Flat	3,2			17	250	20/25 mt.
WLC 300 Flat	4,0			24	300	15 mt.

WLD

Waterstop Joint with Bulb for Expansion Joints (external use)

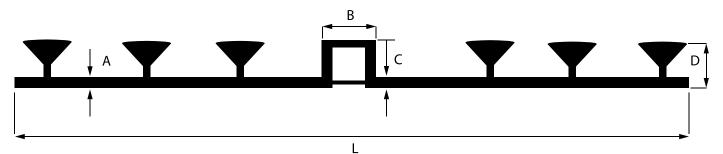

Code	А	В	С	D	L	Withf.
	mm	mm	mm	mm	mm	
WLD 200 Bulb	3,2	19	20	17	200	25 mt.
WLD 250 Bulb	3,2	19	22	17	250	25 mt.
WLD 320 Bulb	4,0	30	30	23	320	15 mt.
WLD 350 Bulb	4,5	30	30	24	350	15 mt.
WLD 350 Bulb	5,0	35	35	27	350	15 mt.

The measures and sections of the waterstops are indicative data and do not bind the company.



ANELTEC srl

Via Tagiura 10 | 20146 Milano | +39 02 42 23 343 | +39 02 48 95 24 70 (Fax) info@aneltec.it | www.aneltec.it